


GRP Kiosks to IP-55 Rating

GRP drop over kiosks are of modular construction and can be assembled on site or transported & fixed in fully assembled condition. The kiosks can be made to suit customer requirements & specifications and doors can be provided either on width sides or on depth sides.



GRP Kiosks to IP-55 Rating

General Drawing

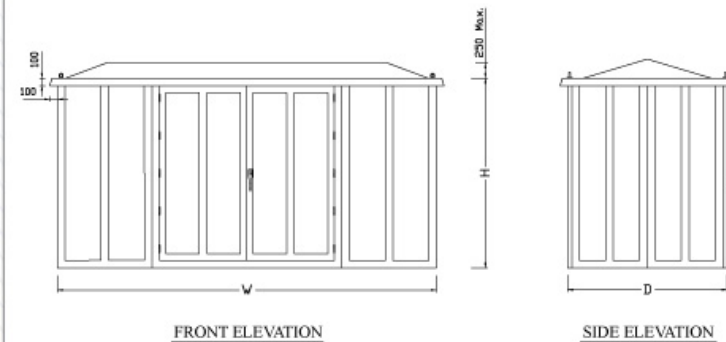

Standard Features

- Stainless steel hinges
- Stainless steel windstray for doors
- WBH handle type 3 point lock
- Stainless steel hardware
- Wall thickness 6 mm & at points of stress 9 mm
- Free standing, high impact & temperature resistant
- Fire retardant, self extinguishing to BS 476: Part 7 : 1997 class 2 / DIN 4102, Class B2
- External finish : Plain semi glass light grey gelcoat finish to RAL 7035
- Lifting hooks
- Interior lighting with door operated switch
- Drawing pocket
- Provision to mount anti condensation heater

Options

- Higher Wall thickness and fire rating
- Access door on width or depth side
- Half an hour fire rating
- Insulated kiosks

Standard Colours

- ◆ Light Grey - RAL 7035
- ◇ Pure White - RAL 9010
- ◇ Light Ivory - RAL 1015
- ◆ Grass Green - RAL 6010

- Other colours on special request

Sizes Available

All dimensions in mm

SL. NO.	PRODUCT REFERENCE	INTERNAL SIZE		
		HEIGHT H	WIDTH W	DEPTH D
1	KS 201009	2000	1000	900
2	KS 201805	2000	1800	500
3	KS 201909	2000	1900	950
4	KS 251009	2500	1000	900
5	KS 251909	2500	1900	950
6	KS 252414	2500	2400	1450
7	KS 252919	2500	2900	1950
8	KS 253414	2500	3400	1450
9	KS 253924	2500	3900	2450
10	KS 254919	2500	4900	1950

For any other size please call for quotation. Design details from those shown can be changed without prior notice.

