

# Special Polyester Enclosure for Metering Cabinet (Multi Window) IP-55

(Suitable for Flush/Wall mounting or free standing)



## Standard Features

- IP rating 55
- Lift off type painted brass hinges
- Long life EPDM gasket
- High impact & temperature resistant
- Latch type  $\Delta/\square$  key locks - 4/6 Nos.
- Facility to put company seal provided
- Awning type canopy on door provided
- Studs for fixing mounting plate provided
- Wall thickness 3 mm and at points of stress 5 mm
- Meter viewing window with lockable door provided
- Fire retardant, self extinguishing to BS 476: Part 7 : 1997 class 2 / DIN 4102 class B2
- MCCB operation window with lockable door provided
- External finish : Plain semi glass light grey gelcoat finish to RAL 7035
- Facility to lock MCCB window door from inside provided
- All hardware galvanised steel or of non-corrosive material

## Standard Colours

- ◆ Light Grey - RAL 7035
- ◇ Pure White - RAL 9010
- ◆ Light Ivory - RAL 1015
- ◆ Grass Green - RAL 6010
- ◆ Flame Red - RAL 3000
- Other colours on special request

## Options


- Stainless steel hardware
- Higher wall thickness and fire rating
- Cylindrical key lock with handle for main door

## Accessories

- Ventilators
- Mounting plate
- Gland plate
- Wall mounting brackets
- Flush mounting GRP frame

# Special Polyester Enclosure for Metering Cabinet (Multi Window) IP-55

## General Drawing

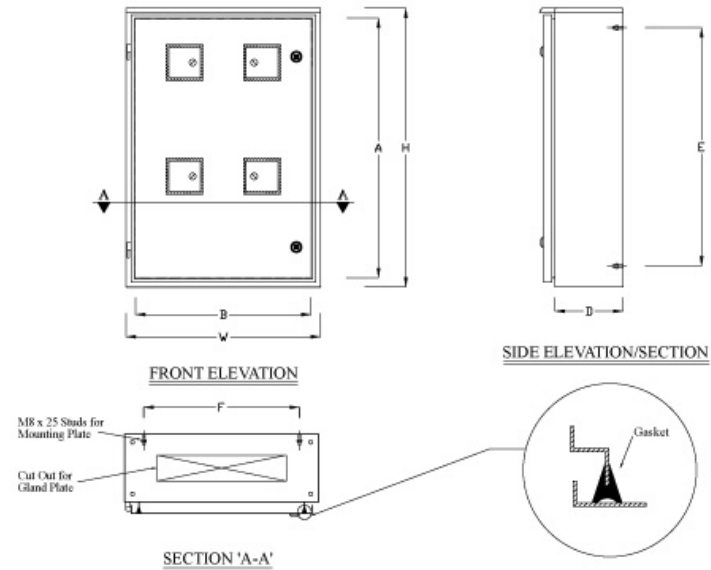

\* Number of windows and location depends on the size of the enclosure

## Sizes Available

All dimensions in mm

SL. NO.	PRODUCT REFERENCE	INTERNAL SIZE			CLEAR OPENING		C/C OF STUDS		CUT OUT FOR GLAND PLATE
		HEIGHT H	WIDTH W	DEPTH D	A	B	E	F	
1	MSD 08052	650	550	210	550	460	470	430	400 X 80
2	MSD 08062	850	600	200	750	500	650	480	400 X 80
3	MSF 08062	850	600	200	750	500	650	480	400 X 80

For any other size please call for quotation.  
Design details from those shown can be changed without prior notice.