

Special Polyester Enclosure for Metering Cabinet (Single Window) IP-55

(Suitable for Flush/Wall mounting or free standing)



Standard Features

- IP rating 55
- Lift off type painted brass hinges
- Long life EPDM gasket
- Latch type Δ/\square key locks - 3 Nos.
- Meter viewing window with lockable door provided
- High Impact & temperature resistant
- Facility to put company seal provided
- Awning type canopy on door provided
- Studs for fixing mounting plate provided
- Wall thickness 3 mm and at points of stress 5 mm
- Fire-retardant, self extinguishing to BS 476: Part 7 : 1997 class 2 / DIN 4102 class B2
- External finish : Plain semi glass light grey gelcoat finish to RAL 7035
- All hardware galvanised steel or of non-corrosive material

Standard Colours

- ◆ Light Grey - RAL 7035
- ◇ Pure White - RAL 9010
- ◆ Light Ivory - RAL 1015
- ◆ Grass Green - RAL 6010
- ◆ Flame Red - RAL 3000
- Other colours on special request

Options


- Stainless steel hardware
- Cylindrical key lock with handle for main door
- Higher wall thickness and fire rating

Accessories

- Ventilators
- Mounting plate
- Gland plate
- Wall mounting brackets

Special Polyester Enclosure for Metering Cabinet (Single Window) IP-55

General Drawing

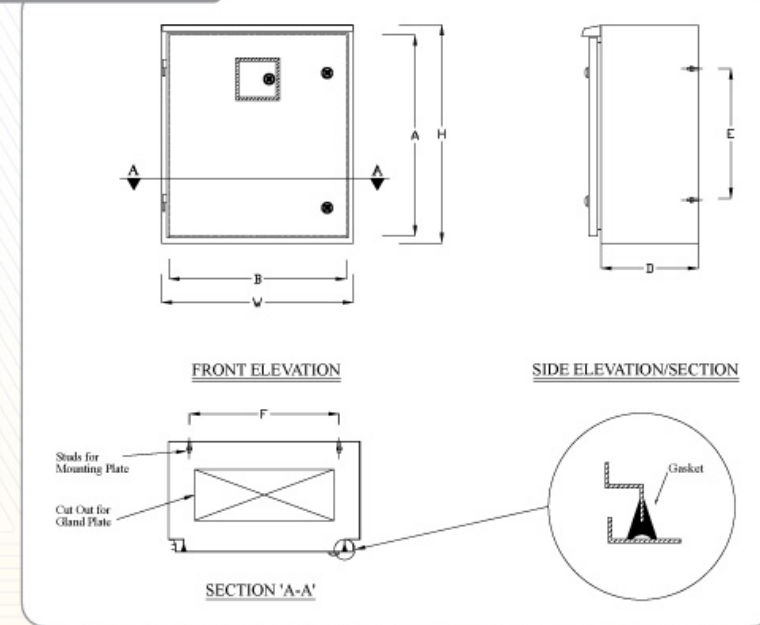

* Window location depends on the size of the enclosure

Sizes Available

All dimensions in mm

SL. NO.	PRODUCT REFERENCE	INTERNAL SIZE			CLEAR OPENING		C/C OF STUDS		CUT OUT FOR GLAND PLATE
		HEIGHT H	WIDTH W	DEPTH D	A	B	E	F	
1	MSS 04042	450	400	200	350	310	300	300	300 X 80
2	MSS 06052	650	550	210	550	460	490	430	400 X 80
3	MSS 08062	850	600	200	750	500	650	480	400 X 80

For any other size please call for quotation.
Design details from those shown can be changed without prior notice.