

Polyester Enclosure for Metering Cabinet IP-65

Polyester Enclosure for Metering Cabinet IP-65

(Suitable for Flush/Wall mounting or free standing)



Standard Features

- IP rating 65
- Lift off type brass hinges
- Long life EPDM gasket
- Additional flat gasket on door
- High Impact & temperature resistant
- Awning type canopy on door provided
- Studs for fixing mounting plate provided
- Wall thickness 3 mm and at points of stress 5 mm
- Fire-retardant, self extinguishing to BS 476: Part 7 : 1997 class 2 / DIN 4102 class B2
- External finish : Plain semi glass light grey gelcoat finish to RAL 7035
- All hardware galvanised steel or of non-corrosive material
- Wing type latch - 3 nos. or 4 nos.
- Wing type lock with keys - 2 nos.

Options

- Stainless steel hardware
- Higher wall thickness and fire rating


Accessories

- Mounting plate
- Gland plate
- Wall mounting brackets
- Transparent window

Standard Colours

- ◆ Light Grey - RAL 7035
- ◇ Pure White - RAL 9010
- ◆ Light Ivory - RAL 1015
- ◆ Grass Green - RAL 6010
- ◆ Flame Red - RAL 3000
- Other colours on special request

General Drawing

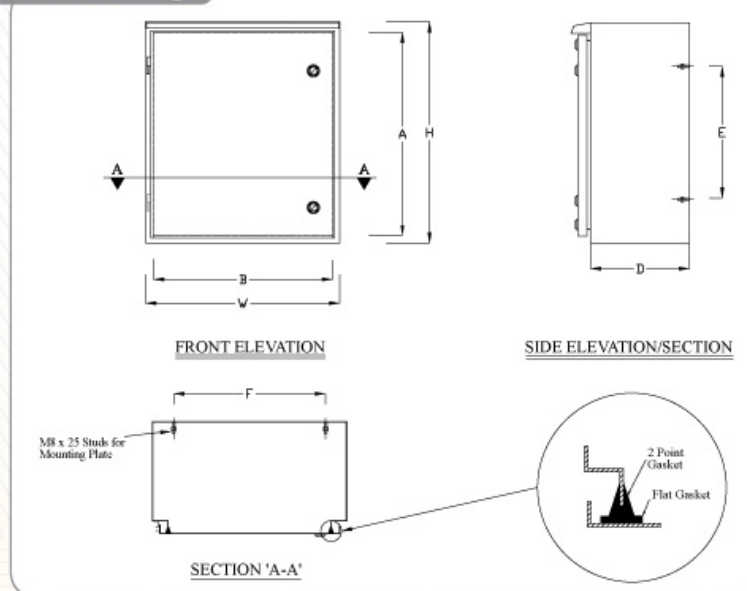

* Number of pressure locks depends upon the size of the enclosure

Sizes Available

All dimensions in mm

SL. NO.	PRODUCT REFERENCE	INTERNAL SIZE			CLEAR OPENING		C/C OF STUDS		CUT OUT FOR GLAND PLATE
		HEIGHT H	WIDTH W	DEPTH D	A	B	E	F	
1	M 03021i	300	200	120	250	145	210	---	---
2	M 04031i	450	300	180	405	250	300	230	200 X 80
3	M 04042i	450	400	200	350	310	300	300	300 X 80
4	M 05052i	520	520	200	400	400	350	400	400 X 80
5	M 06042i	600	450	250	500	350	450	350	350 X 120
6	M 06042i	600	400	250	500	310	450	310	300 X 120
7	M 06032i	650	350	240	550	260	490	250	250 X 80
8	M 06052i	650	550	210	550	460	490	430	400 X 80
9	M 06052i	850	550	280	750	460	650	450	400 X 120
10	M 06062i	850	600	200	750	500	650	480	400 X 80

For any other size please call for quotation.
Design details from those shown can be changed without prior notice.